

Superbase Crystal: The comfort of EPI Superbase Classic with the addition of inlaid fine crystals. With a timeless design and a 40 year approximate life span, a Superbase Crystal floor is the perfect investment.

APPLICATION TIME: 5 DAYS

Subfloor preparation may add to this time

GUARANTEE: 6 YEARS

A long lasting, unique, seamless floor

TYPICAL THICKNESS: 2-3 MM

PROPERTIES

- Decorative inlaid crystals
- Comfortable underfoot
- Noise reducing
- Easy to maintain
- Solvent free and environmentally friendly
- BREEAM rated
- **System EPD available**


TYPICAL DATA

Layers	4
Elasticity	135%
Shore Hardness	D60
Abrasion Resistance	Good
Fire Classification	C _s 1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	3dB+
Slip Rating	R9/R10/R11 EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



Superbase Crystal Typical Section

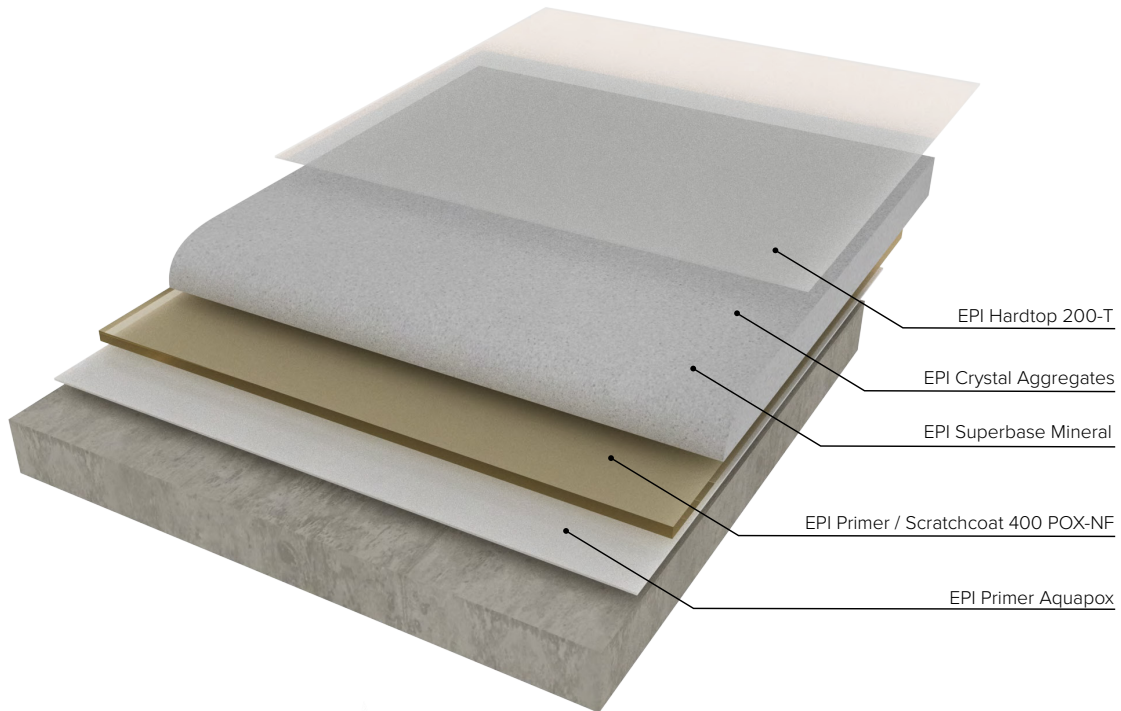

Typical System Build Up Superbase Crystal

• Primer	- EPI Primer Aquapox	- 0.15 - 0.25 kg/m ²
• Primer/Scratch Coat	- EPI Primer/Scratchcoat 400 POX-NF	- 0.70 - 1.5 kg/m ²
• Body Coat	- EPI Superbase Mineral	- 2.8 - 3.0 kg/m ²
• Aggregate	- EPI Crystal Aggregate	- 0.3kg/m ²
• Seal Coat	- EPI Hardtop 200-T	- 0.08 - 0.1 kg/m ²