

Superbase Gusto: Designed to create the look of traditional Italian terrazzo with a simpler installation method. With the option of a fine or medium aggregate size of Carrara and Nero marble as well as Mother of Pearl.

APPLICATION TIME: 5 DAYS

Subfloor preparation may add to this time

GUARANTEE: 6 YEARS

Long lasting, seamless flooring

TYPICAL THICKNESS: 3-4 MM

PROPERTIES

- Decorative mineral filler
- Comfortable underfoot
- Noise reducing
- Easy to maintain
- Solvent free and environmentally friendly
- BREEAM rated
- **System EPD available**


TYPICAL DATA

Layers	4
Elasticity	135%
Shore Hardness	D60
Abrasion Resistance	Good
Fire Classification	C _{fl} s1

Area Use Classification	23/33 - EN685
Impact Sound Reduction	6dB+
Slip Rating	R9/R10/R11 EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



Superbase Gusto Typical Section

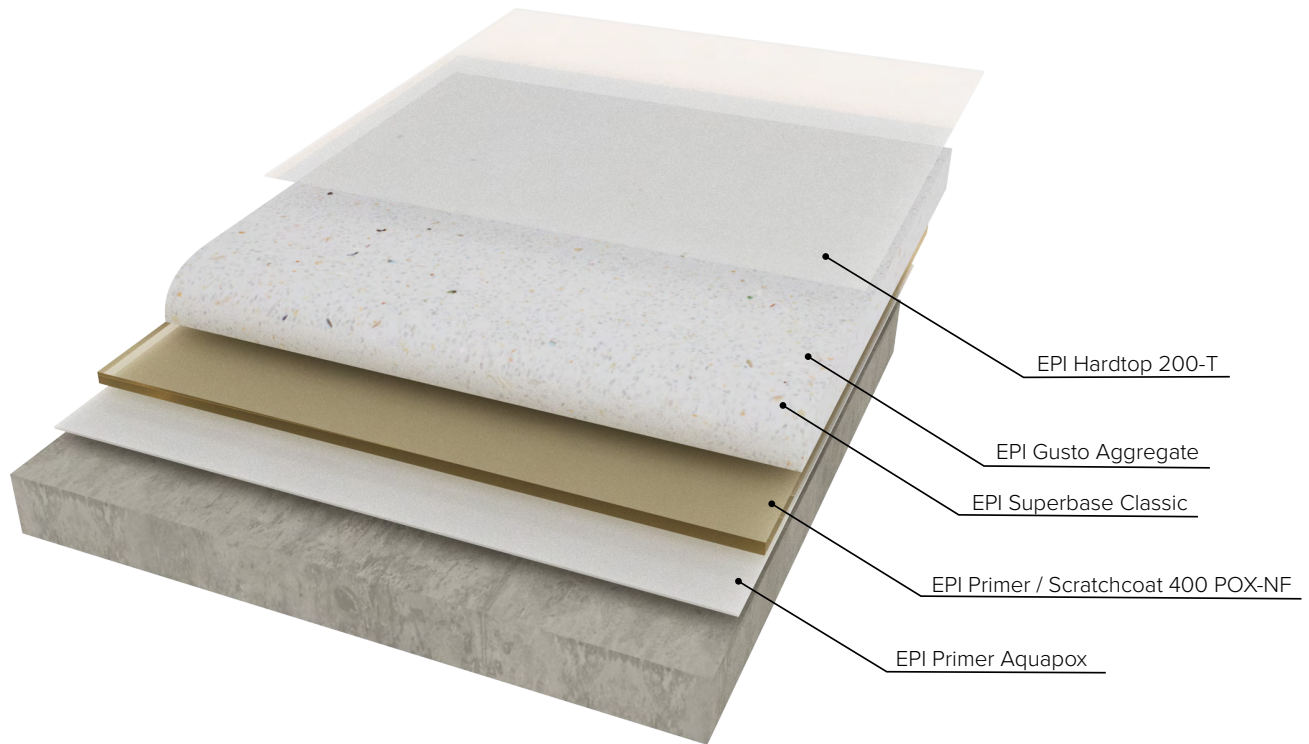

Typical System Build Up Superbase Gusto

• Primer	- EPI Primer Aquapox	- 0.15 - 0.25 kg/m ²
• Primer/Scratch Coat	- EPI Primer/Scratchcoat 400 POX-NF	- 0.70 - 1.5 kg/m ²
• Body Coat	- EPI Superbase Mineral	- 2.8 - 3.0 kg/m ²
• Aggregate	- EPI Gusto Aggregate	- 1.2 kg/m ²
• Seal Coat	- EPI Hardtop 200-T	- 0.08 - 0.1 kg/m ²