

**HealthSphere:** Medical or sports environments have very specific needs and this flooring system is designed to meet these. The HealthSphere system was created for spaces such as hospital rooms, clinics, spas and fitness centres where hygiene is paramount.

#### APPLICATION TIME: 4 - 5 DAYS

We require exclusive site access for installation

#### GUARANTEE: 5 YEARS

With a typical lifespan of over 20 years

#### THICKNESS: 4MM typical

7mm thickness if used with shockpad\*

#### A SAFE AND STYLISH ALTERNATIVE

- Hypoallergenic and bacteriostatic
- Seamless surfaces avoid harbouring bacteria
- Able to withstand frequent cleaning
  - Long-lasting and cost-effective
- Exceptional comfort and bounce
  - Almost any colour possible
  - Antistatic grade available


#### TYPICAL DATA

Layers	4/6*
Elasticity	200%
Shore Hardness	D45
Abrasion Resistance	Good
Fire Classification	B <sub>fl</sub> s1 - EN 13501-1
Fire Classification (with shockpad)*	D <sub>fl</sub> s2 - EN 13501-1*

Area Use Classification	33 - EN685
Impact Sound Reduction	5dB
Impact Sound Reduction* (with shockpad)	20dB*
Slip Rating	R9/R10/R11- EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



## HealthSphere Typical Section

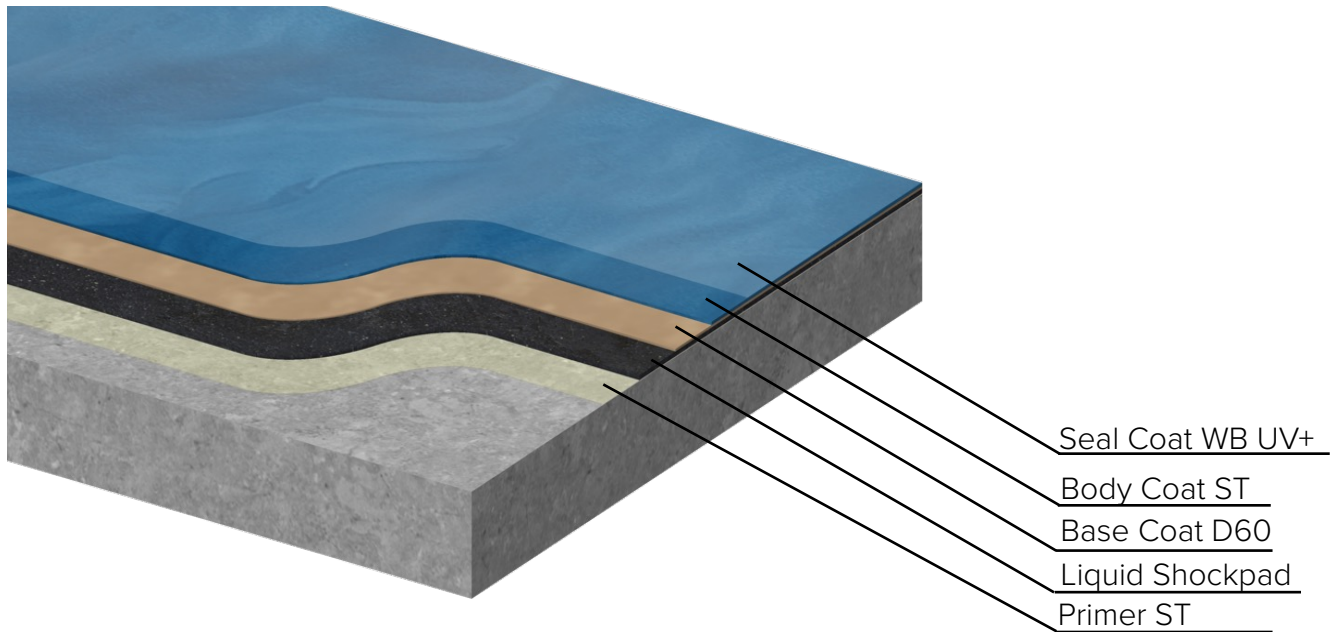

## Typical System Build Up HealthSphere

• <b>Primer</b>	- Primer ST	- 1kg/m <sup>2</sup>
• <b>Liquid Shockpad</b>	- Silencio dB	- 4kg/m <sup>2</sup>
• <b>Base Coat</b>	- Basecoat D60	- 2kg/m <sup>2</sup>
• <b>Body Coat</b>	- Body Coat UV+	- 2.25kg/m <sup>2</sup>
• <b>Seal Coats</b>	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m <sup>2</sup>

Other primer options and seal coats variations are possible