

# ToughSphere Xtreme: An extremely tough PU Concrete flooring, steam cleanable, non slip, perfect for heavy and even industrial use

## APPLICATION TIME: 2+ DAYS

Installation varies with size and detailing

## GUARANTEE: 5 YEARS

Excellent abrasion and chemical resistance

## THICKNESS: 6-9 MM

Typical finished thickness of 6-9mm.

## TOUGH AND DURABLE

- Exceptional chemical resistance
- Suitable over many subfloor types
- Non-slip throughout its life
- High impact resistance
- High temperature resistance up to 120°C
- Limited colour range (non UV stable)


### TYPICAL DATA

Layers	3 (typical)
Elasticity	5%
Shore Hardness	D95
Abrasion Resistance	Excellent

Fire Classification	B <sub>fl</sub> -s1 - EN 13501-1
Area Use Classification	Heavy Duty
Slip Rating	R10 EN 51130
FeRFA Type	Type 8 - BS 8204



# ToughSphere Xtreme Typical Section

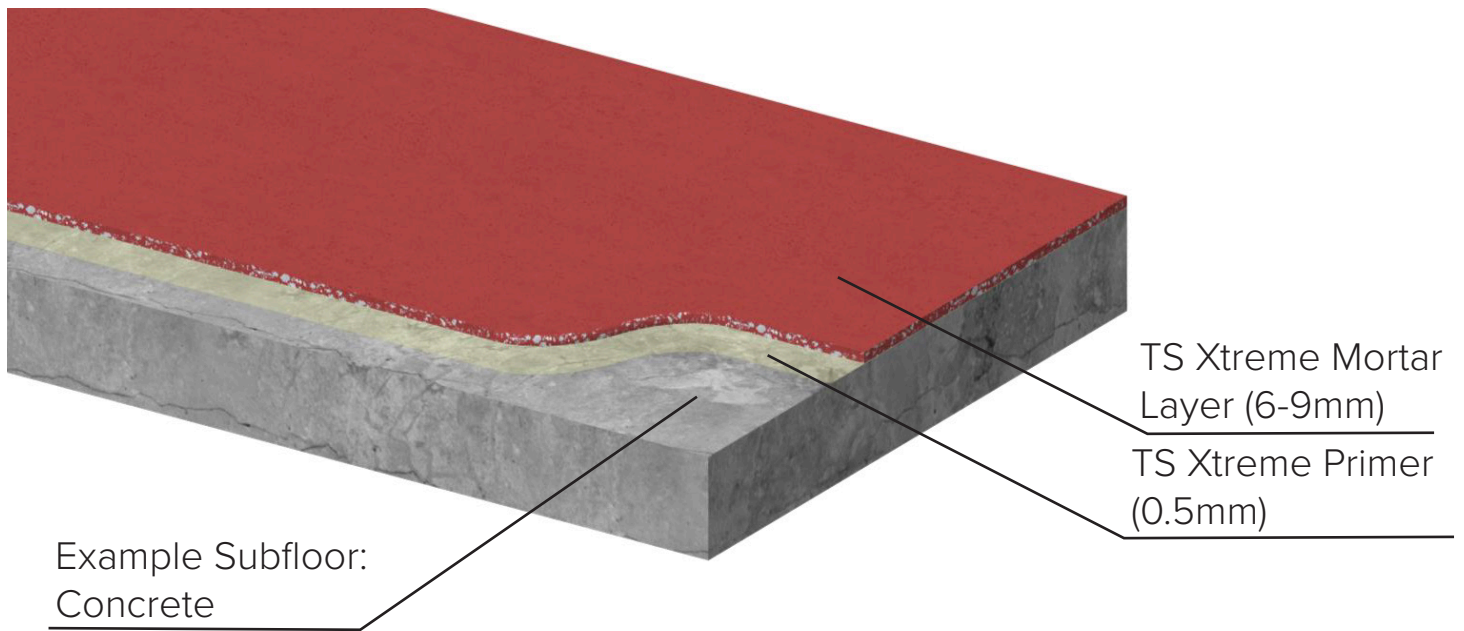

## Typical System Build Up ToughSphere Xtreme

- |                 |                                      |                                  |
|-----------------|--------------------------------------|----------------------------------|
| • <b>Primer</b> | - ToughSphere Xtreme Primer          | - 0.25 - 0.5kg kg/m <sup>2</sup> |
| • <b>Mortar</b> | - ToughSphere Xtreme<br>Mortar Layer | - 12 -18 kg/m <sup>2</sup>       |