

**ArtSphere:** The ultimate bespoke system, the ArtSphere floor is created to your own specification. Used when a client has a particular specific finish they wish to recreate - from different layered pigments, to a glittery floor.

**APPLICATION TIME: 6 DAYS**

Installation times vary depending on the brief

**GUARANTEE: 5 YEARS**

Typical lifespan of up to 20 years with maintenance

**TYPICAL THICKNESS: 3-6 MM**

Varies according to design brief

**TYPICAL DATA**

Layers (typically)	6
Elasticity	25%
Shore Hardness	D75
Abrasion Resistance	Good
Fire Classification	B <sub>f</sub> s1 - EN 13501-1


**AN UNSPECIFIED BRIEF**

- We can work to images which you provide
- Hand-applied in layers to the exact brief
- Dedicated project planner to liaise throughout
- Bespoke finish from transparent resin and coloured fillers
- Rapid system possible (2-3 days)
- Almost any colour possible

Area Use Classification	23/33 - EN685
Impact Sound Reduction	2dB+
Slip Rating	R9/R10/R11 - EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



# ArtSphere Typical Section

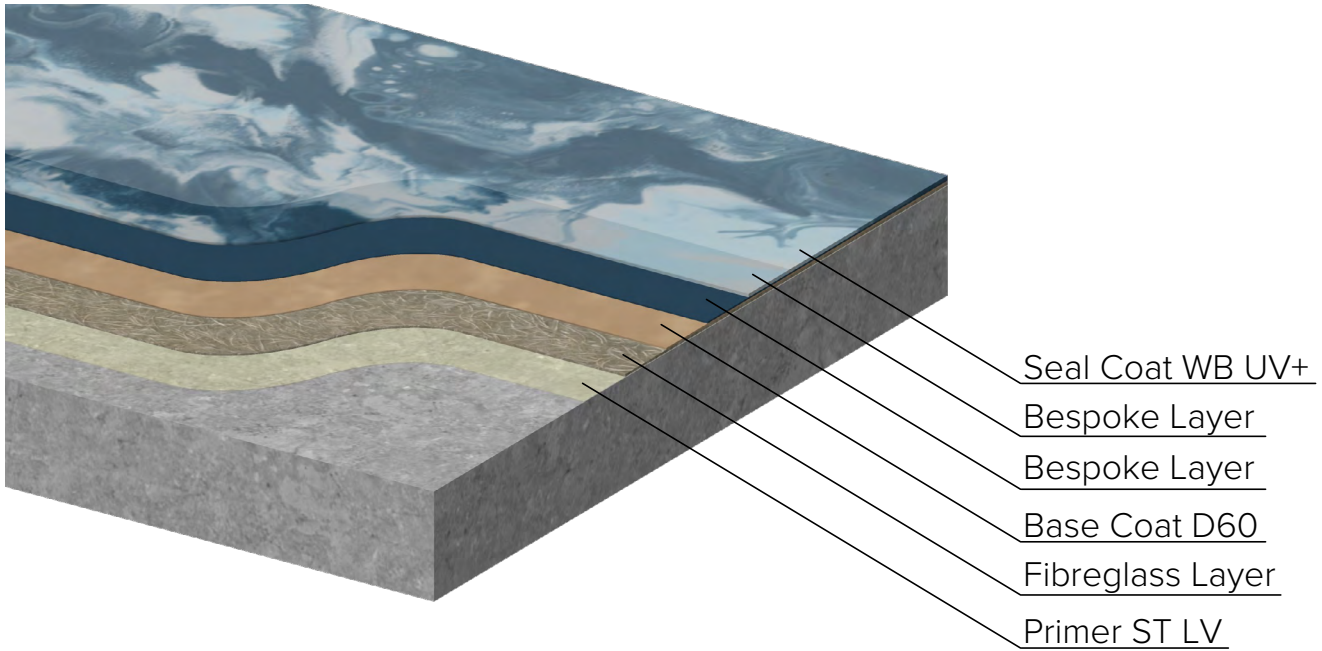

- Seal Coat WB UV+
- Bespoke Layer
- Bespoke Layer
- Base Coat D60
- Fibreglass Layer
- Primer ST LV

## Typical System Build Up ArtSphere

• <b>Primer</b>	- Primer ST	- 0.5kg/m <sup>2</sup>
• <b>Reinforced Base Coat</b>	- Primer STL/ST/Rapid	- 1.0kg/m <sup>2</sup>
• <b>Fibreglass Embedment</b>	- 225gsm chop strand matting	- 1m <sup>2</sup> /m <sup>2</sup>
• <b>Base Coat</b>	- Basecoat D60	- 0.60kg/m <sup>2</sup>
• <b>Bespoke Layer</b>	- Custom mix	- 1-1.50kg/m <sup>2</sup>
• <b>Bespoke Layer</b>	- Custom mix	- 1-1.50kg/m <sup>2</sup>
• <b>Seal Coats</b>	- Seal Coat WB UV+ Clear	- 0.10kg/m <sup>2</sup>

Other primer options and seal coats variations are possible