

BrecciaSphere Lite Lux: Biopolymer “liquid stone” with a natural mineral effect surface through pixellation with recycled single use plastic, includes reinforced base coat.

APPLICATION TIME: 5 DAYS

Installation varies with size and detailing

GUARANTEE: 12 YEARS

Non crack, non-fade, comfort flooring

THICKNESS: 4-5 MM

Typical finished thickness of 5mm

ELASTIC AND DURABLE

- Exceptional sound-damping qualities
- Stylish liquid stone effect in most colours
 - Includes glass fibre base
- Suitable over many subfloor types
 - 100% UV stable
- Exceptional durability and comfort
 - Solid and motion variants


TYPICAL DATA

Layers	6 (typical)
Elasticity	160%
Shore Hardness	D55
Abrasion Resistance	Very Good
Fire Classification	B _{fl} -s1 - EN 13501-1

Area Use Classification	23/34/42 - EN685
Impact Sound Reduction	2-16dB
Slip Rating	R9/R10/R11 EN 51130
Resistance to Chair Castors	Good - EN 425
FeRFA Type	Type 5 - BS 8204



BrecciaSphere Lite Lux Typical Section

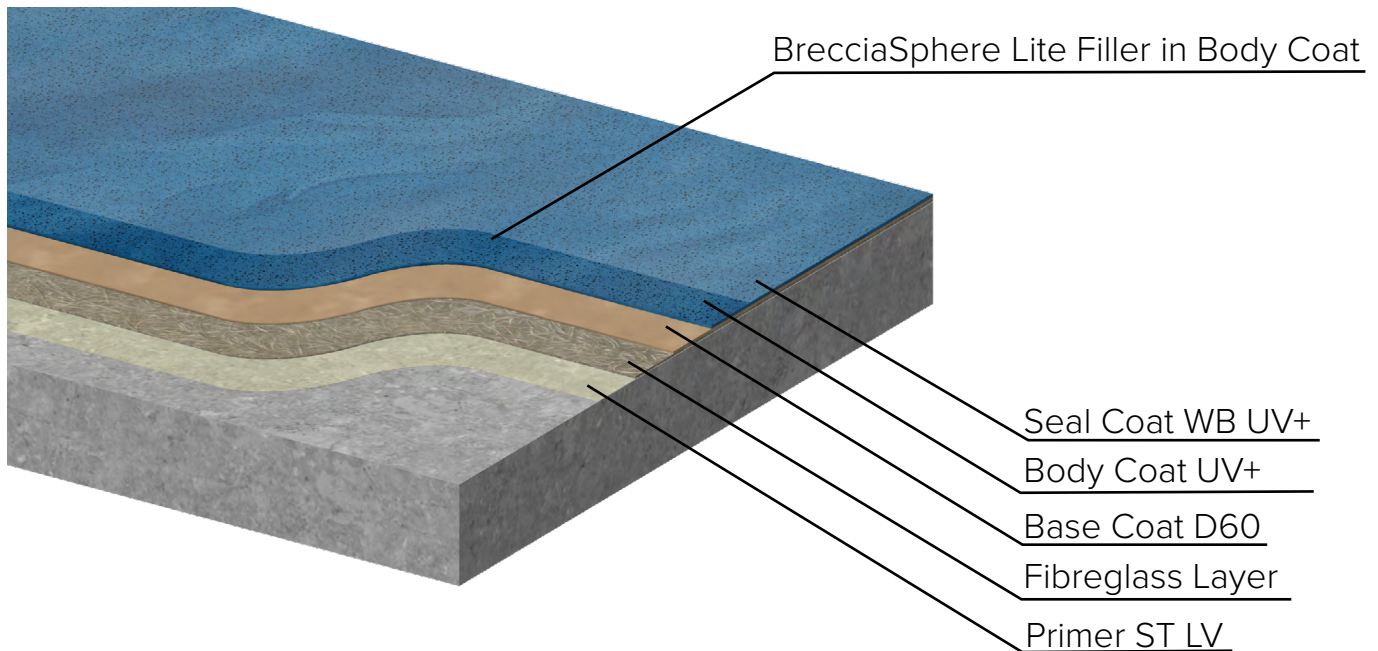

Typical System Build Up BrecciaSphere Lite Lux

• Primer	- Primer Rapid	- 0.20kg/m ²
• Reinforced Base Coat	- Primer ST LV	- 0.80kg/m ²
• Fibreglass Embedment	- 225gsm chop strand matting	- 1m ² /m ²
• Base Coat	- Basecoat D60	- 1.5kg/m ²
• Body Coat	- Body Coat UV+	- 3kg/m ²
• BrecciaSphere Lite Shred	- BrecciaSphere Lite Shred Filler	- 0.06kg/m ²
• Seal Coats	- Seal Coat WB UV+ Clear	- 2 x 0.08kg/m ²

Other primer options and seal coats variations are possible