

www.sphere8.com

LuxSphere: Our flagship residential flooring solution, LuxSphere offers a long warranty and a fixed price installation (no extra costs are generally anticipated). Featuring improved surface preparation, standard trims included and a reinforced base coat.

APPLICATION TIME: 5 DAYS

Subfloor preparation may add to this time

GUARANTEE: 12 YEARS

Double that of the HomeSphere system

TYPICAL THICKNESS: 4-5 MM

TYPICAL DATA

| | |
|---------------------|--------------------------------|
| Layers | 6-7 |
| Elasticity | 230% |
| Shore Hardness | D50 |
| Abrasion Resistance | Good |
| Fire Classification | B _f s1 - EN 13501-1 |


HIGHEST PERFORMANCE FOR YOUR HOME

- Natural plant oil base
- Fully reinforced base coat layers
- No additional preparation costs
- Longer guarantee and warranty
- Perfect with underfloor heating
 - 100% UV Stable
- Almost any colour possible

| | |
|-----------------------------|---------------------|
| Area Use Classification | 23/33 - EN685 |
| Impact Sound Reduction | 6dB+ |
| Slip Rating | R9/R10/R11 EN 51130 |
| Resistance to Chair Castors | Good - EN 425 |
| FeRFA Type | Type 5 - BS 8204 |



LuxSphere Typical Section

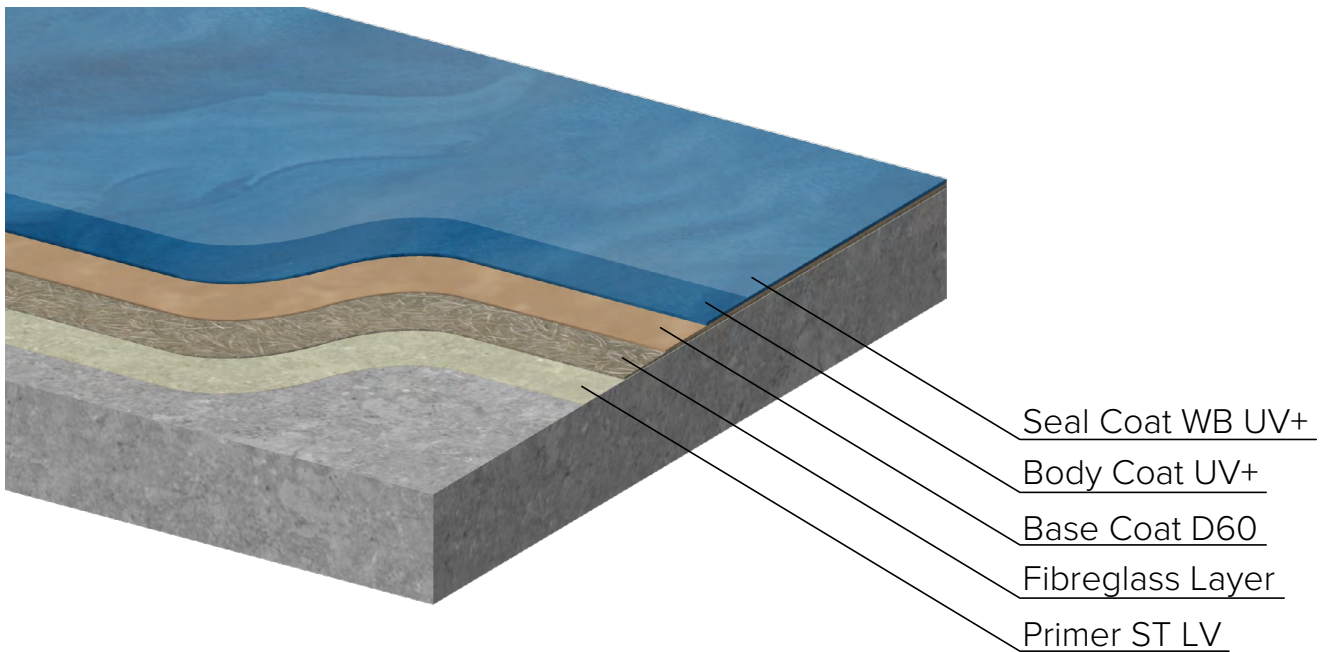

Typical System Build Up LuxSphere

| | | |
|--|------------------------------|-----------------------------------|
| • Primer | - Primer ST/LV/Rapid | - 1 x 0.3kg/m ² |
| • Reinforced Base Coat Fibreglass Embedment | - Primer STL/ST/Rapid | - 1 x 1.0kg/m ² |
| | - 225gsm chop strand matting | - 1m ² /m ² |
| • Base Coat | - Basecoat D60 | - 2kg/m ² |
| • Body Coat | - Body Coat UV+ | - 2.8kg/m ² |
| • Seal Coats | - Seal Coat WB UV+ Clear | - 2 x 0.08kg/m ² |

Other primer options and seal coats variations are possible